



AVK WALL POST INDICATOR

34/80-001

For AVK post indicator valves, UL/ULC and FM

AVK wall post indicators are available in three fixed lengths. The handwheel can be locked to make the valves tamper proof, and the AVK wall post indicators have a pre-cast threaded boss for mounting a supervisory switch.

Product description:

Post indicator - Wall type - UL/ULC Listed & FM approved

Standards:

- Designed according to DIN/AWWA, Designed according to FM class no. 1110, Designed according to UL 789, Designed according to ULC CEX 1393

Test/Approvals:

- FM Approved, UL/ULC listed

Features:

- UL/ULC Listed (DN 100-400) and FM approved (DN 100-350)
- Designed to operate on DN 50-400 indicator valves
- Available with stem lengths 250, 750 and 1250 mm
- Prepared for supervisory switch
- Lockable with strap
- Head of ductile iron with epoxy coating internally and externally and a topcoat of UV-resistant polyester coating externally.



Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.


©2022 AVK GROUP A/S

yupzon - 02-Mar-2022 13:48

AVK WALL POST INDICATOR

34/80-001

For AVK post indicator valves, UL/ULC and FM

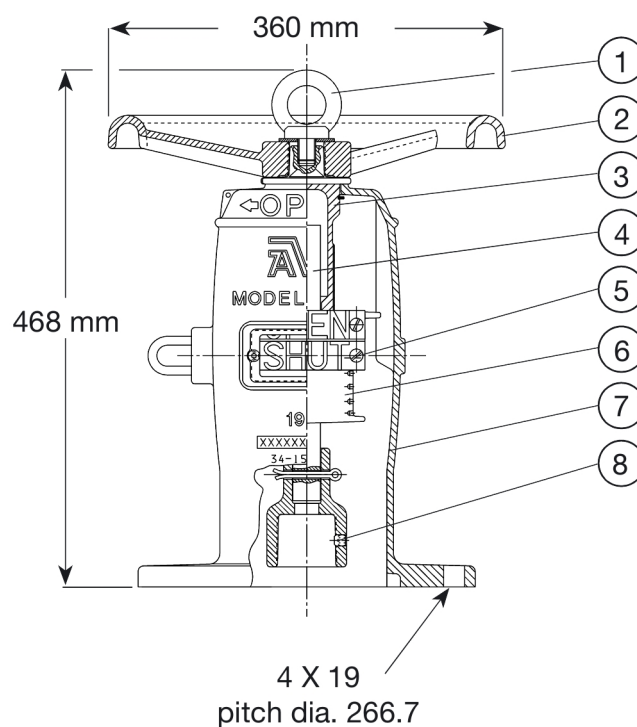

Component list:

1. Eye bolt	Steel, hot dip galvanized	5. Target sign	Aluminium
2. Handwheel	Cast iron	6. Target	Copper alloy
3. Stem nut	Copper alloy	7. Wall indicator head	Ductile iron GJS-500-7 (GGG-50)
4. Stem	Steel	8. Wrench nut	Ductile iron GJS-500-7 (GGG-50)

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Stem length mm	Theoretical weight/kg
34-050-80-00010010 ⁽¹⁾	50	250	29
34-065-80-00010010 ⁽¹⁾	65	250	29
34-080-80-00010010 ⁽¹⁾	80	250	29
34-100-80-00010010	100	250	29
34-100-80-01010010	100	750	32
34-100-80-02010010	100	1250	34
34-150-80-00010010	150	250	29
34-150-80-01010010	150	750	32
34-150-80-02010010	150	1250	34
34-200-80-00010010	200	250	29
34-200-80-01010010	200	750	32
34-200-80-02010010	200	1250	34
34-250-80-00010010	250	250	29
34-250-80-01010010	250	750	32
34-250-80-02010010	250	1250	34
34-300-80-00010010	300	250	29
34-300-80-01010010	300	750	32
34-300-80-02010010	300	1250	34
34-350-80-01010010	350	750	32
34-350-80-02010010	350	1250	34
34-400-80-00000010 ⁽²⁾	400	250	29
34-400-80-00020010 ⁽²⁾	400	1250	34

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

AVK WALL POST INDICATOR

34/80-001

For AVK post indicator valves, UL/ULC and FM

Reference nos. and dimensions:

AVK ref. no.	DN mm	Stem length mm	Theoretical weight/kg
34-400-80-01010010 ⁽²⁾	400	750	32
(1) Not UL/ULC and FM approved			
(2) Only UL/ULC listed			